Specifications

SMART Board™ interactive whiteboard

Model X880

Physical specifications

Size 66 1/8" W × 51 1/8" H × 6 1/2" D

 $(168 \text{ cm} \times 130 \text{ cm} \times 16.5 \text{ cm})$

Active screen area 61 5/8" W × 46 1/4" H (156.5 cm × 117.3 cm)

(maximum interactive, 77" (195.6 cm) diagonal, 4:3 aspect ratio

Weight 52.2 lb. (23.7 kg)

Shipping size

1 unit 56 3/4" W × 75 3/4" H × 4 3/8" D (144.1 cm × 192.4 cm × 11.1 cm)

10 units on pallet 44 1/4" W × 56 3/4" L × 80 3/8" H

(112.4 cm × 144.1 cm × 204.2 cm)

Shipping weight

projected image)

1 unit 76 lb. (34.5 kg)

10 units on pallet 780 lb. (353.8 kg)

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

Standard features

System requirements Win

Windows® operating systems and Mac operating system software as detailed in the SMART Notebook™ collaborative learning software release notes (smarttech.com/kb/126571).

Software

Download software for your interactive whiteboard from the following links:

- Windows computers: <u>smarttech.com/SBX800Win</u>
- Mac computers: <u>smarttech.com/SBX800Mac</u>



2 | SPECIFICATIONS - SMART BOARD INTERACTIVE WHITEBOARD - MODEL X880

Touch and gestures Perform mouse functions with your finger, and write and erase digital ink with a pen

tray pen or the eraser. The Object Awareness feature enables you to pick up a pen,

and then write, select or erase without replacing the pen.

Dual sketch capabilities Enables two users to draw simultaneously on the interactive whiteboard surface

Pen tray Removable end caps for optional accessories. Optical sensors in the pen tray detect

when you lift a pen or eraser from the tray. Color buttons on the pen tray enable you to

select pen color.

Pens and eraser Two ergonomic pens with a comfort grip and a rectangular eraser

Resolution Digitizing resolution 65.534 x 65.534

Screen surface The hard-coated steel surface is durable, optimized for projection, compatible with

dry-erase markers and easily cleaned with whiteboard cleaner.

Digitizing technology Four camera DViT™ (Digital Vision Touch) technology

Frame finish Two-tone gray (dark gray approximates Pantone® Charcoal Gray 18-0601 TPX)

Wall-mount bracket 32" (81.3 cm) wide bracket with five screws and toggle bolt anchors to support a

wall-mounted interactive whiteboard

Computer connection 16' (5 m) USB 2.0 cable, 6' (1.8 m) power cable

Power requirements Power consumption is less than 7 W (100V to 240V AC, 50/60 Hz, 5V DC 2.0A).

Environmental China EIP, EU RoHS, WEEE

compliance

Regulatory certifications CE, CSA (U.S./Canada)

Warranty Five-year limited equipment warranty upon registration. See warranty document for

details.

Storage and operating specifications


Storage -40°F to 120°F (-40°C to 50°C)

Operation 41°F to 95°F (5°C to 35°C) with up to 80% humidity, non-condensing

SMART order number

SBX880 77" (195.6 cm) diagonal SMART Board interactive whiteboard

Physical dimensions

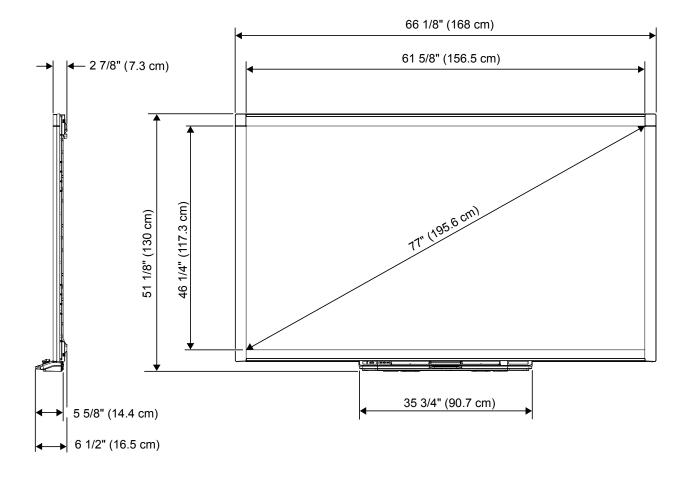

www.smarttech.com/support www.smarttech.com/contactsupport Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

